


スラスト玉軸受 Thrust ball bearings

F 形 F

内径 2 ～ 10mm
Bore diameter 2 ～ 10mm

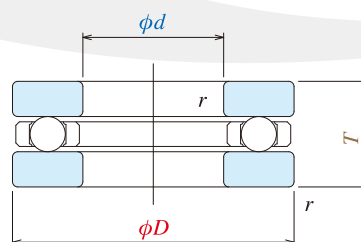


呼び番号 Bearing numbers	主要寸法 (mm) Boundary dimensions				質量 (g) Mass (参考) (approx)	基本定格荷重 Basic load ratings			
	<i>d</i>	<i>D</i>	<i>T</i>	<i>r</i> 最小 min		<i>Ca</i> (N)	<i>Coa</i> (N)	<i>Ca</i> {kgf}	<i>Coa</i> {kgf}
F2-6	2	6	3.0	0.1	0.49	151	44.0	15.0	4.5
F2X-7	2.5	7	3.5	0.1	0.81	211	64.0	21.0	6.5
F3-8	3	8	3.5	0.15	1.21	233	75.0	23.0	7.5
F4-9	4	9	4.0	0.15	1.37	232	85.0	24.0	8.5
F4-10	4	10	4.5	0.15	1.93	375	131	38.0	13.0
F5-11	5	11	4.5	0.15	2.22	360	131	37.0	13.0
F6-12	6	12	4.5	0.15	2.48	410	168	42.0	17.0
F7-15	7	15	5.0	0.2	4.22	835	335	85.0	34.0
F8-16	8	16	5.0	0.2	4.81	565	237	58.0	24.0
F9-17	9	17	5.0	0.2	4.99	860	380	88.0	38.0
F10-18	10	18	5.5	0.2	6.01	840	380	86.0	38.0

溝付きスラスト玉軸受 Thrust ball bearings with groove

F-M 形 F-M

内径 3.2 ～ 10.2mm
Bore diameter 3.2 ～ 10.2mm



呼び番号 Bearing numbers	主要寸法 (mm) Boundary dimensions						質量 (g) Mass (参考) (approx)	基本定格荷重 Basic load ratings			
	<i>d</i>	<i>di</i>	<i>D</i>	<i>Di</i>	<i>T</i>	<i>r</i> 最小 min		<i>Ca</i> (N)	<i>Coa</i> (N)	<i>Ca</i> {kgf}	<i>Coa</i> {kgf}
F3-7M	3	3.2	7	6.8	3	0.05	0.47	570	530	58.0	54.0
F3-8M	3	3.2	8	7.8	3.5	0.05	0.86	1000	930	102.0	95.0
F4-9M	4	4.2	9	8.8	4	0.05	1.12	955	930	97.0	95.0
F4-10M	4	4.2	10	9.8	4	0.1	1.47	930	930	95.0	95.0
F5-10M	5	5.2	10	9.8	4	0.1	1.33	1200	1400	122	142
F5-12M	5	5.2	12	11.8	4	0.1	2.05	1070	1240	109	127
F6-12M	6	6.2	12	11.8	4.5	0.15	2.16	1840	2220	187	226
F6-14M	6	6.25	14	13.8	5	0.15	3.53	2170	2440	222	249
F7-15M	7	7.2	15	14.8	5.5	0.15	4.10	4050	5000	415	510
F7-17M	7	7.2	17	16.8	6	0.15	6.41	3100	3800	315	390
F8-19M	8	8.2	19	18.8	7	0.2	9.27	3950	4950	405	505
F9-17M	9	9.2	17	16.8	5	0.2	4.05	3850	5000	395	510
F9-20M	9	9.2	20	19.8	7	0.2	9.92	3900	4950	395	505
F10-20M	10	10.2	20	19.8	6.5	0.15	8.45	5500	7550	560	770